

## Product Name: XCITE FLOOD CC MICROWAVE SENSOR

### General Information

- This luminaire must be installed in accordance with the latest edition of the IET Wiring Regulations and local Building Regulation by a qualified competent person.
- The mains power supply must be turned off before inspection, installation or removal of the luminaire, ensuring that the supply is locked off to prevent inadvertently switching the supply on.
- It is the installer's responsibility to ensure that the installation is suitable for the total load of the luminaire(s). The supply cable fuses/circuit breakers must be correctly rated for the electrical load and taking into account for any transient inrush currents that may occur.
- It is the installer's responsibility to ensure that the environmental operating and storage conditions are complied with and that any fire risks are considered.
- Do not perform insulation strength or insulation resistance tests on the installation with the luminaire(s) connected, this can damage the luminaires and give erroneous readings.
- Do not loop-in supply cables at the luminaire supply terminals unless there is provision for 2-way connection at the terminals.
- The light source contained in this luminaire must only be replaced by TamLite Lighting or an appointed service agent.
- Emergency lighting luminaires must be installed and maintained in accordance with the emergency lighting standard BS 5266-1.
- To ensure that the product warranty remains valid, the luminaire must be installed and maintained in accordance with these installation instructions and the product must not be modified in any way.

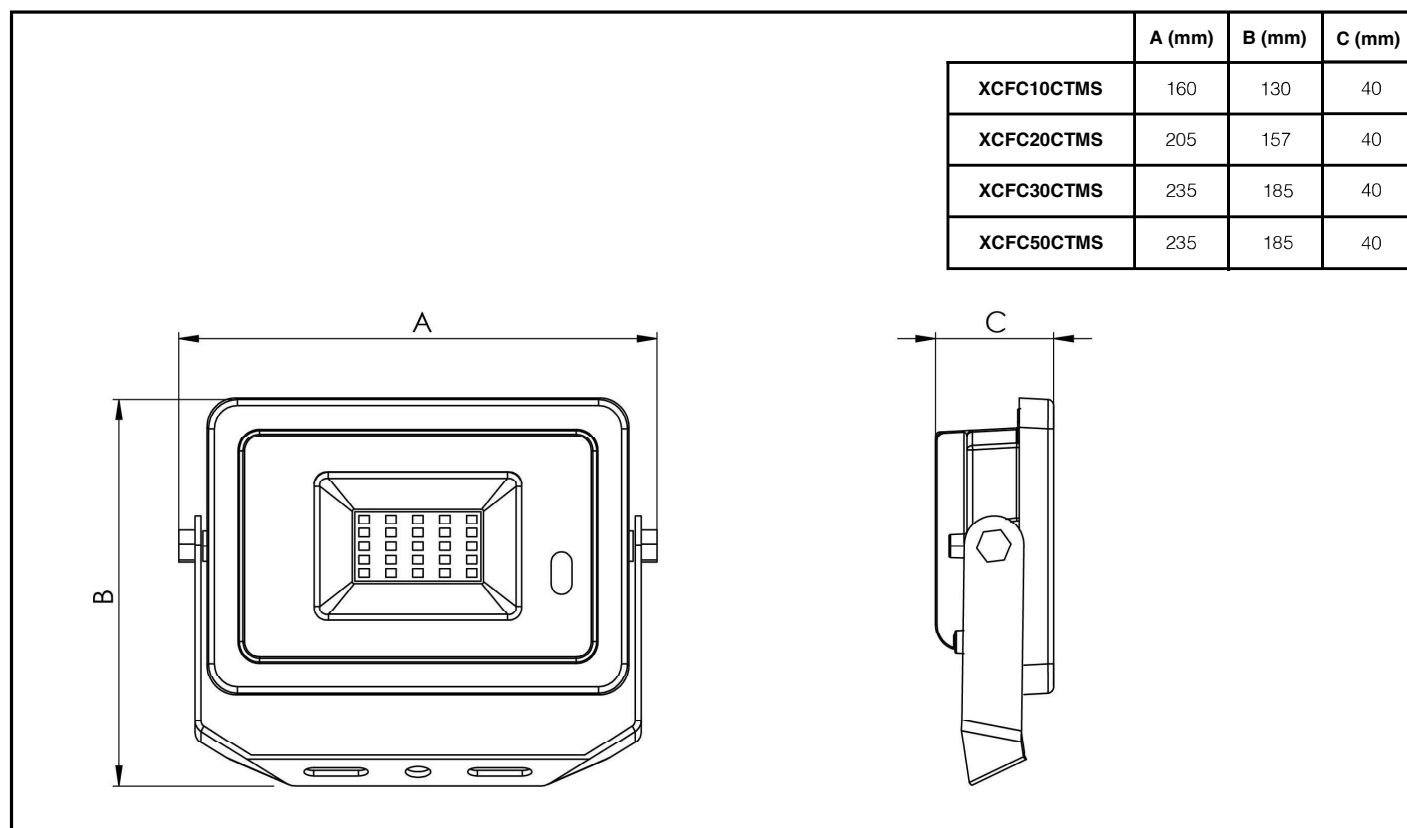


Luminaires marked with this symbol must not be covered with thermally insulating material.

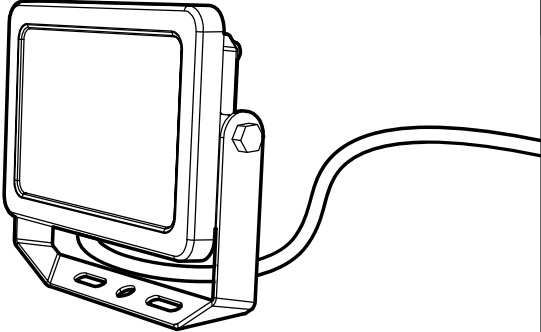
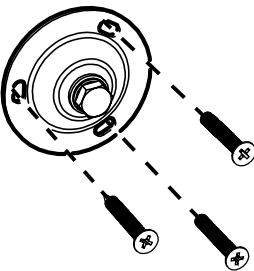
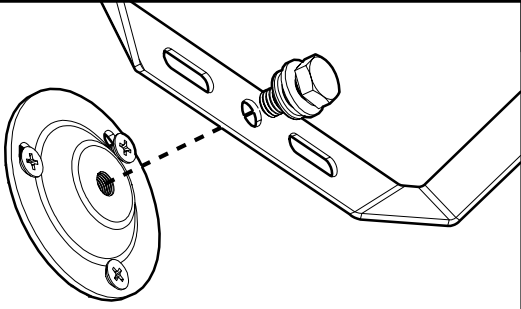
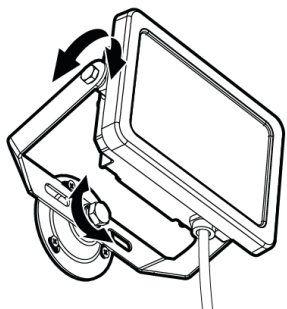
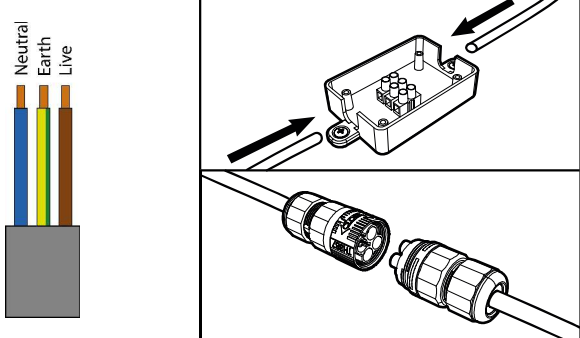
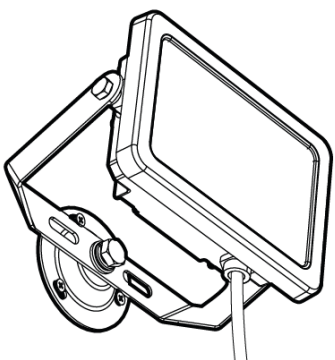


This symbol on covers over light sources indicates dangerous live parts do not operate the luminaire with this cover removed.

### Dimensions




## Product Name: XCITE FLOOD CC MICROWAVE SENSOR

<p><b>1</b></p>  <p>Remove the Product from its packaging.</p>	<p><b>2</b></p>  <p>Mount the disc bracket to the wall using appropriate fixings.</p>
<p><b>3</b></p>  <p>Attach the floodlight to the disc bracket with the bolt provided.</p>	<p><b>4</b></p>  <p>Adjust rotation and tilt to the desired position and tighten the bolts to secure.</p>
<p><b>5</b></p>  <p>Terminate mains cable to the prewired lead using a suitable IP65 rated connector.</p>	<p><b>6</b></p> 

## Page 2 of 3

Tamlite Technical  
Stafford Park 12,  
Telford, Shropshire,  
TF3 3BJ

+44(0)1952 292441  
technical@tamlite.co.uk  
Document No: V2



## Product Name: XCITE FLOOD CC MICROWAVE SENSOR

7

### MICROWAVE SENSOR INSTRUCTIONS


The distance between two luminaires should be more than 50cm. No large metal obstructions in front of the luminaire. To set the below settings, aim the remote at the floodlight and press the desired option.

Default Settings:  
Sensitivity: 100%  
Duration Time: 5Seconds  
Mode: Daylight


**ON** Overrides the sensor, the floodlight will remain lit continuously.

**OFF** Overrides the sensor, the floodlight will remain off continuously.

#### Mode

 Daylight Mode: The floodlight will operate via the integral microwave sensor, presence is detected regardless of the ambient light level.

 Nightlight Mode: The floodlight will operate via the integral microwave sensor, presence is detected only at night.

 Photocell Mode: The integral sensor will operate as a "dusk-to-dawn" photocell rather than a presence detector.

#### Duration Time

The length of time the luminaire stays on from the last movement detected. Can be selected by pressing the corresponding button.  
Min 10sec. > Max 10min.

#### Detection range / Sensivity

To increase or decrease the distance of which movement will be detected, select one of the following modes:

 Max. Mode 7-9 Metres

 Mid. Mode 4-6 Metres

 Min. Mode 1-3 Metres

#### Brightness

#### CCT (correlated colour temperature)

To change the colour select one of the following mode:

 DL 6000K / Daylight

 WW 3000K / Warm White

 NW 4000K / Neutral White

